

# RETRO TRI SCOOTER WITH BASKET INSTRUCTIONS

**K: 43-560-035 | T: 71-045-122**

**WARNING! Assembly by an adult.**

**WARNING! Not suitable for children younger than 2 years old, due to the danger of falling.**

**WARNING! Not suitable for children with a body mass of more than 50kg.**

**WARNING! Always wear an approved safety helmet, knee and elbow pads while riding. Check all nuts and bolts for tightness before riding. Never leave your child unattended on this product. Not permitted for use on public roads and highways. This product is not designed for road use. Use only on smooth, flat paved and dry surfaces, free of sand, gravel or dirt.**

**WARNING! Do not allow prolonged eye contact with the light source.**

**WARNING! Do not allow several children to use the scooter at the same time.**

**WARNING! Make sure your child is physically capable of controlling the scooter and understands how to apply the brakes.**

**WARNING! Before each use, check the scooter for any possible damaged, loose, or missing parts. Make sure all bolts and quick-release connections are tightened properly and the parts are securely fastened. Do not use the scooter if any parts are missing, damaged, or broken.**

**WARNING! The disassembled scooter and the cardboard packaging contain small parts and plastic bags, which pose a danger to small children.**

**Please store the parts and bags out of reach of children.**


## Technical Maintenance

- Make sure that all parts remain clean, free of dust, dirt or sand.
- For cleaning the scooter, use a damp cloth.
- Lubricate the moving parts only when it is necessary (apply a small amount of silicone-based lubricant).
- Periodically check the scooter for the presence of loosely tightened screws or worn-out parts.
- Replace or repair the parts as necessary.
- Store the scooter in a dry place.
- Prolonged exposure to direct sunlight may cause deformation of the plastic parts.

## Assembly

### ! ATTENTION:

The assembly should be carried out by adults! Disregarding this warning and the assembly instructions may lead to serious injuries.

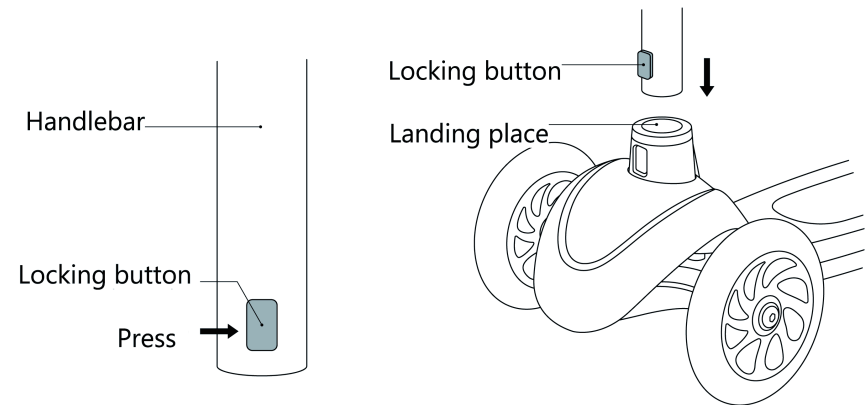

### Installation of the handlebar:

Press the locking button and insert the handlebar into the stand as shown in the top illustration.

### Note:


In order to pull out the handlebar, it is necessary to press the locking button.

### Handlebar height adjustment:

Turn the top clamp to the side as shown in the figure.

While holding the regulator button, raise or lower the handlebar until the button pops out of the hole.

To finally lock the handlebar, be sure to return the eccentric lever to its original position.

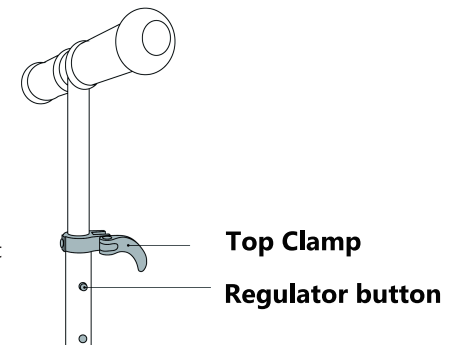

**MADE IN CHINA**  
**CUSTOMER SERVICE:**  
**KMART AU: 1800 124 125**  
**KMART NZ: 0800 945 995**  
**TARGET AU: 1300 753 567**